



FONTES DE PARIS

ILLUMINATION DES VILLES DU MONDE




LEDCUP

DESCRIPTION

Launched at the beginning of 2020, the Ledcup is a luminaire that offers an original and elegant design, particularly adapted to parks, residential streets, cycling lanes, pedestrian walkways and plazas.

Its recommended installation height is of 3 to 6 meters. It is equipped with high performance Nichia LEDs and is delivered pre-wired with a H07 RNF cable, with 3 or 5 1.5mm conductors. Like our other KJLed and Ledrose luminaires, the Ledcup is entirely fashioned out of 100% recycled aluminium. The luminaire is offered with several photometric options as well as a 4DIM driver. Several devices can be added, such as a motion detecting sensor, a Zhaga captor, or a «smart city» module.

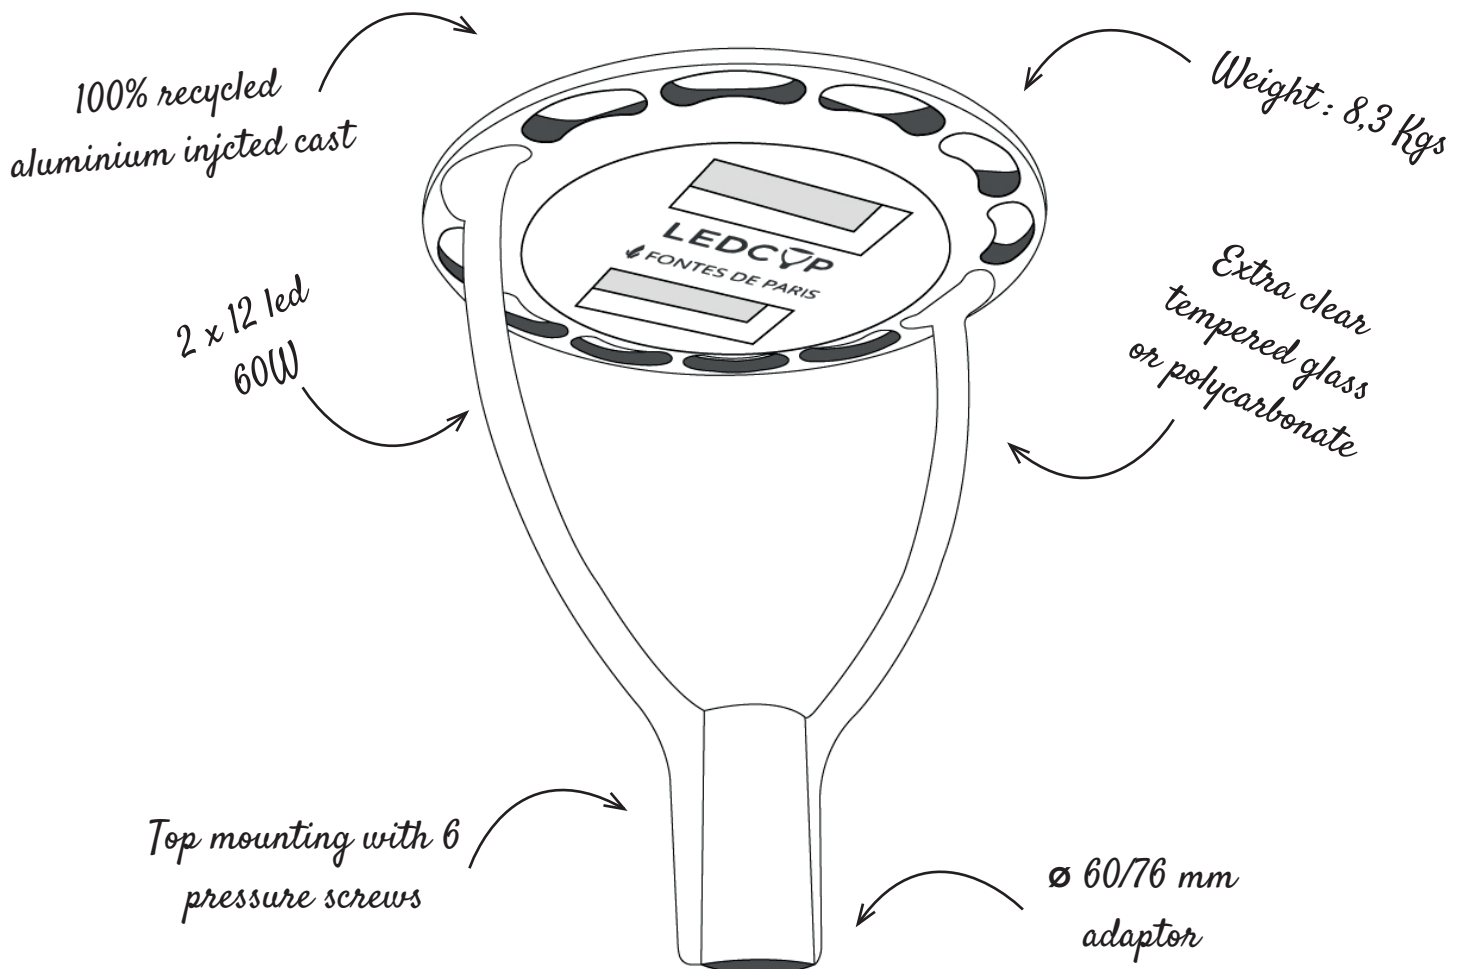

TECHNICAL DESCRIPTION



- > Single size diameter 520mm & height 670mm
- > 2 PCB of 12LED Nichia standard Zhaga with NTC
- > Color temperatures 2200°K - 2700°K - 3000°K - 4000°K
- > IP 66
- > 100% recycled aluminium injected cast
- > Powder coated polyester with RAL of your choice
- > Sea side treatment available
- > Extra clear tempered glass IK08 or polycarbonate IK10
- > «Fontes de Paris» serigraphy
- > Fitting class 1 or class 2
- > Top mounting ø 60 or 76mm
- > Delivered pre-cabled R07 RNF 3x or 5x 1.5mm
- > Eligible for energy certificates
- > ENEC certificate pending

CONFORMITY (27/12/18 DECREE)

- > ULR = 0.5%
- > Flux code CIE N°3 = 98%
- > Areal density determined by our design office after study



OPTIONS

- > Presence detector
- > Customized hourly dimming
- > Constant flow (CLO)
- > Backwards flow control (backlight)





LEDCUP

INNOVATIVE

DESIGN

ECOLOGICAL




The Ledcup luminaire adapts itself perfectly to all types of architectures and environments and will highlight parcs, urban roads, parkings and rural zones.





POWER

			4000K	3000K	2700K	2200K
N. LED	mA	W TOT	lm OUT	lm OUT	lm OUT	lm OUT
24	350	25	3,291	3,137	3,088	2,496
24	500	36	4,561	4,346	4,280	3,457
24	600	44	5,371	5,111	5,040	4,067
24	700	52	6,153	5,842	5,774	4,652


PHOTOMETRY

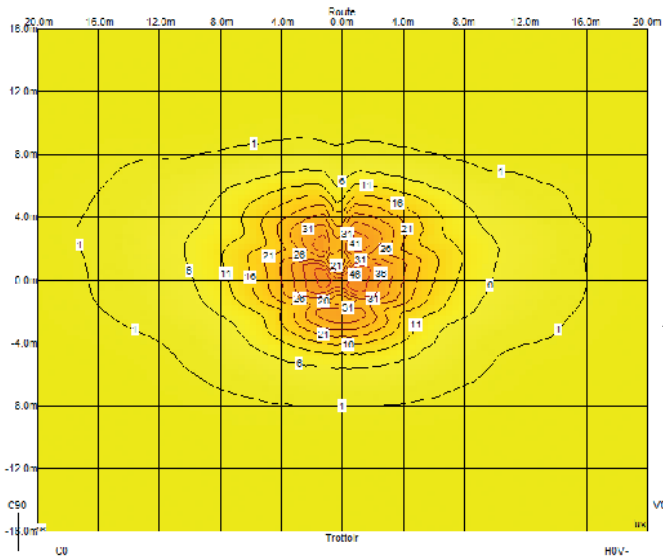


STD
ASSYM

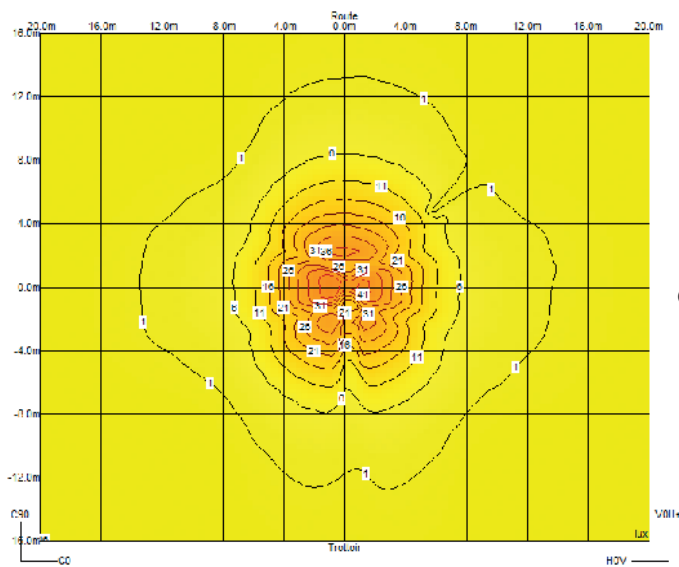
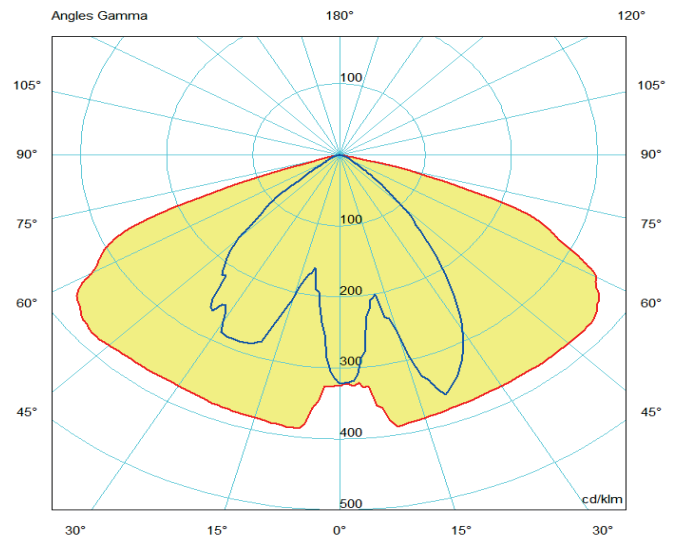


STD
CIRC


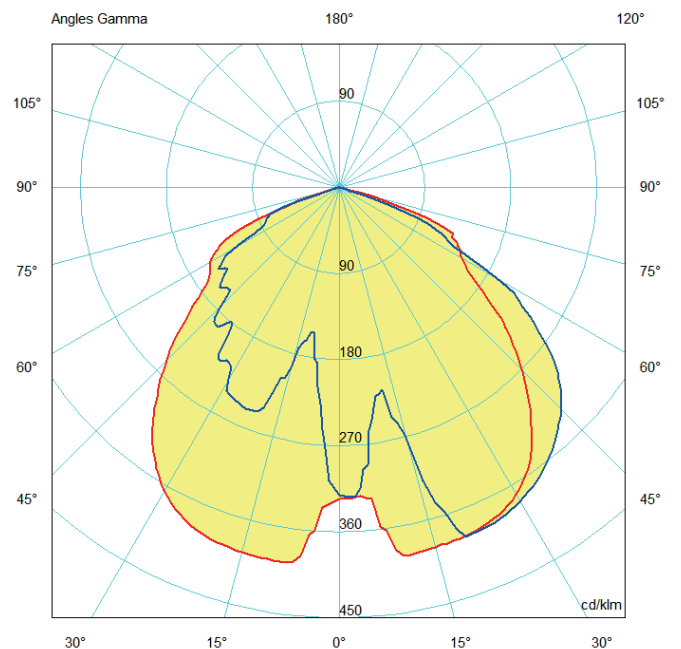


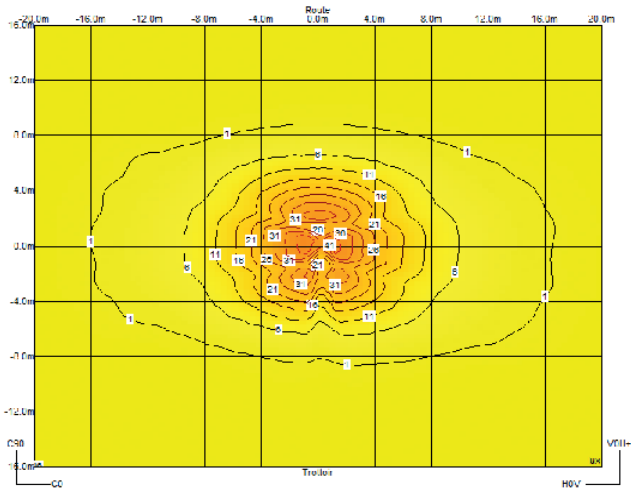



STD
SYM

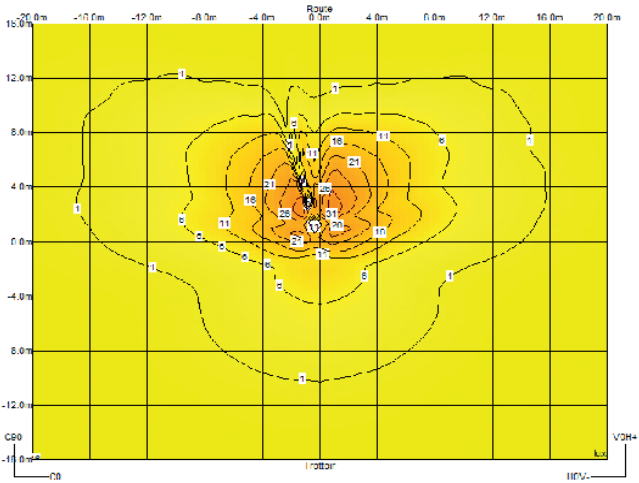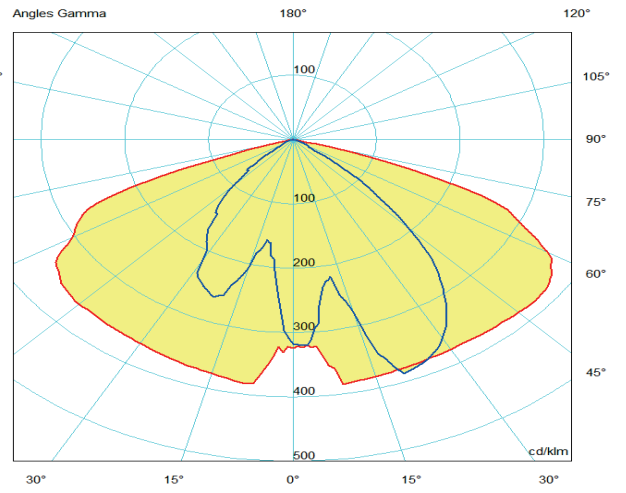


RLA
ASSYM

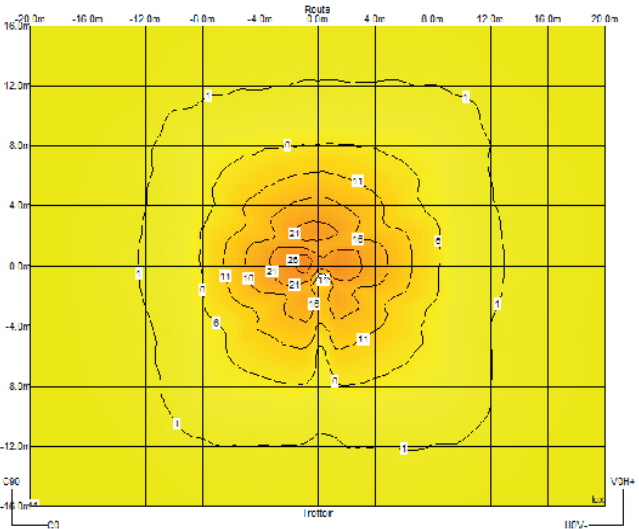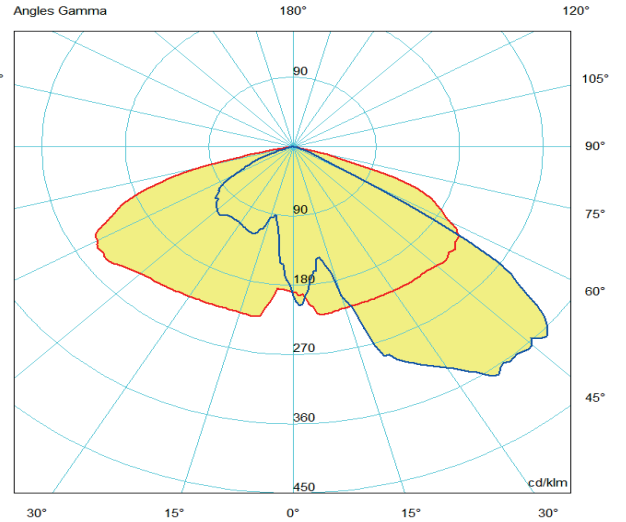

RLA
CIRC

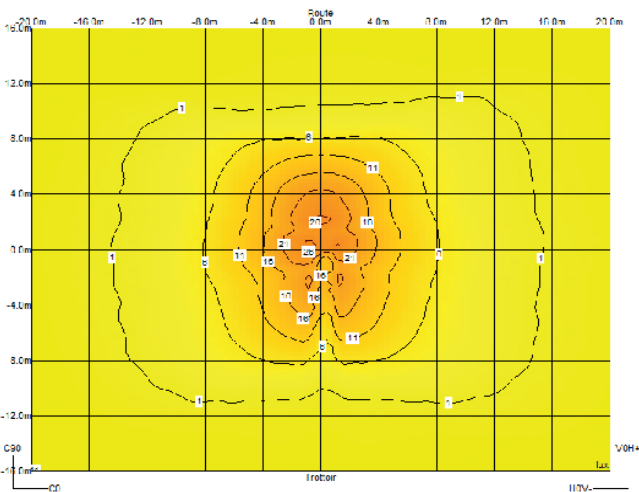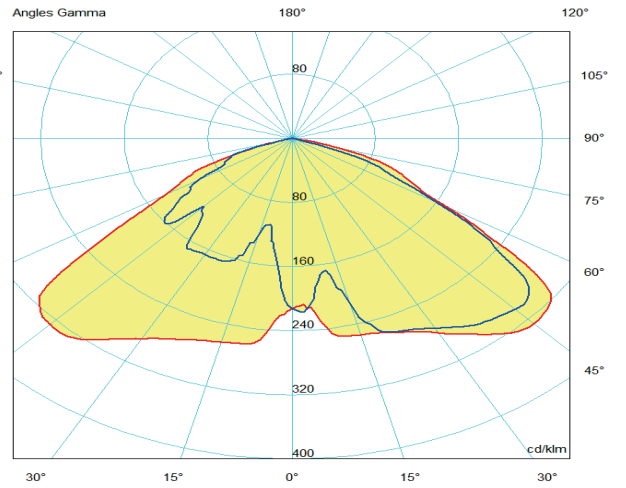

RLA
SYM

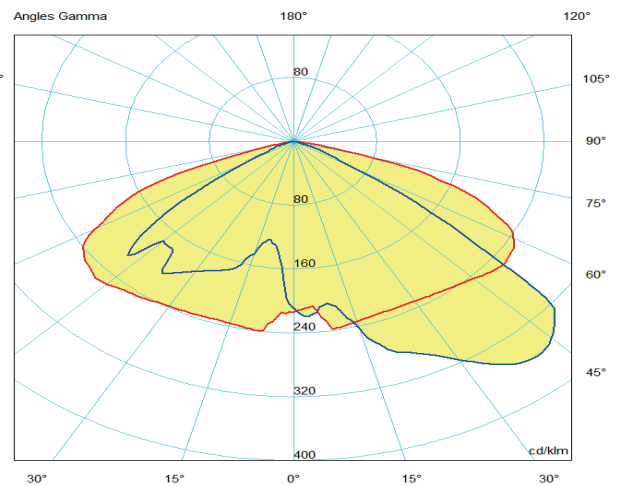



FONTES DE PARIS

ILLUMINATION DES VILLES DU MONDE

Industrial Zone - 10330 CHAVANGES

Tél : +33 (0)3 25 92 39 54

contact@fontesdeparis.com

www.fontesdeparis.com

Deposited model